

#### **ExamsNest**

**Your Ultimate Exam Preparation Hub** 

---

Vendor: Fortinet
Code: NSE6 FSW-7.2

**Exam: Fortinet NSE 6 - FortiSwitch 7.2** 

https://www.examsnest.com/exam/nse6\_fsw-72/


QUESTIONS & ANSWERS
DEMO VERSION

# QUESTIONS & ANSWERS DEMO VERSION (LIMITED CONTENT)

# Version: 5.0

Question: 1	
Refer to the diagnostic output:	
# diagnose switch-controller switch-info mac-table	
Vdom: root	
S224EPTF19005928 0 :	
MAC address Interface vlan	
	====
04:d5:90:39:73:3d internal 4092	
04:d5:90:3e:e2:88 port1 4089	
00:50:56:96:e3:fc GVM1V0000141680 4089	
04:d5:90:39:73:3d internal 4094	
00:50:56:96:e3:fc GVM1V0000141680 4094	
Two entries in the exhibit show that the same MAC address has been Which MAC address is shown in the above output?	used in two different VLANs.
A. It is a MAC address of FortiLink interface on FortiGate.	
B. It is a MAC address of a switch that accepts multiple VLANs.	
C. It is a MAC address of an upstream FortiSwitch.	
D. It is a MAC address of FortiGate in HA configuration.	
	Answer: B
Question: 2	
Refer to the exhibit	

#### MCL-Topology

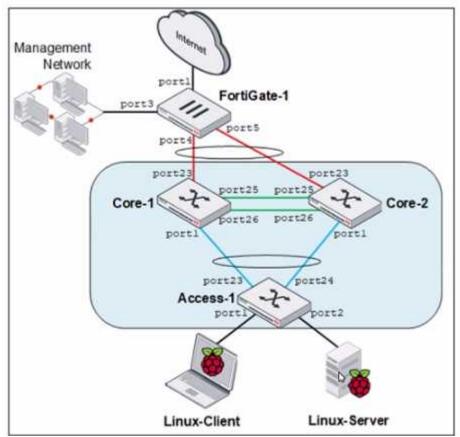

Core-1 and Access-1 are managed and authorized by FortiGate-1. which uses port4 as the FortiLink interface. After FortiGate authorizes and manages Core-2. Port1 status becomes STP discarding. Why is port1 in the discarding state?

- A. port1 on Core-2 is discarding only management traffic.
- B. Core-1 and Core-2 do not have MCLAG configuration.
- C. Access-1 is the root bridge and can only have one root port.
- D. Core-2 has the lowest bridge priority.

Answer: B

#### Question: 3

Which two statements about the FortiLink authorization process are true? (Choose two.)


- A. The administrator must manually pre-authorize FortiGate on FortiSwitch by adding the FortiGate serial number.
- B. FortiSwitch requires a reboot to complete the authorization process.
- C. A FortiLink frame is sent by FortiGate to FortiSwitch to complete the authorization.
- D. FortiLink authorization sets the FortiSwitch management mode to FortiLink.

Answer: C, D

## Question: 4

#### Refer to the exhibits

### Topology

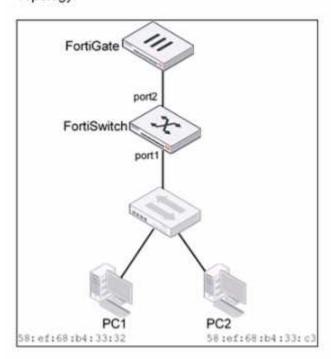



Traffic arriving on port2 on FortiSwitch is tagged with VLAN ID 10 and destined for PC1 connected on port1. PC1 expects to receive traffic untagged from port1 on FortiSwitch.

Which two configurations can you perform on FortiSwitch to ensure PC1 receives untagged traffic on port1? (Choose two.)


- A. Add the MAC address of PCI as a member of VLAN 10.
- B. Add VLAN ID 10 as a member of the untagged VLANs on port1.
- C. Remove VLAN 10 from the allowed VLANs and add it to untagged VLANs on port1.
- D. Enable Private VLAN on VLAN 10 and add VLAN 20 as an isolated VLAN.

Answer: A, B


**Question: 5** 

Refer to the exhibits.

#### LoopGuard-setup



#### LoopGuard-setup

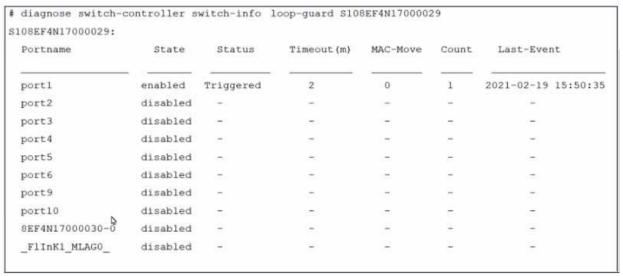

Port1 and port2 are the only ports configured with the same native VLAN 10. What are two reasons that can trigger port1 to shut down? (Choose two.)

- A. port1 was shut down by loop guard protection.
- B. STP triggered a loop and applied loop guard protection on port1.
- C. An endpoint sent a BPDU on port1 that it received from another interface.
- D. Loop guard frame sourced from port 1 was received on port 1.

Answer: B, C



## Thank You for trying the PDF Demo

Vendor: Fortinet Code: NSE6\_FSW-7.2

Exam: Fortinet NSE 6 - FortiSwitch 7.2 https://www.examsnest.com/exam/nse6\_fsw-72/

Use Coupon "SAVE15" for extra 15% discount on the purchase of Practice Test Software. Test your Exam preparation with actual exam questions.

# Start Your Preparation