

### **ExamsNest**

**Your Ultimate Exam Preparation Hub** 

---

Vendor: HP Code: HPE6-A85

**Exam: Aruba Certified Campus Access Associate Exam** 

https://www.examsnest.com/exam/hpe6-a85/


QUESTIONS & ANSWERS
DEMO VERSION

# QUESTIONS & ANSWERS DEMO VERSION (LIMITED CONTENT)

Question: 2

# Version: 4.2

Question: 1	
A network technician is using Aruba Central to troubleshoot network is used to view and acknowledge issues when beginning the troubleshoo	
A. the Alerts and Events dashboard B. the Audit Trail dashboard C. the Reports dashboard D. the Tools dashboard	
	Answer: A
Explanation:	
The Alerts and Events dashboard displays all types of alerts and events to device provisioning, configuration, and user management. You can use alerts and notifications for different alert categories and severities1. You events in the List view and Summary view2.  Reference: 1 https://www.arubanetworks.com/techdocs/central/latestalerts.htm 2 https://www.arubanetworks.com/techdocs/central/latestalerts.htm	use the Config icon to configure ou can also view the alerts and t/content/nms/alerts/configuring-

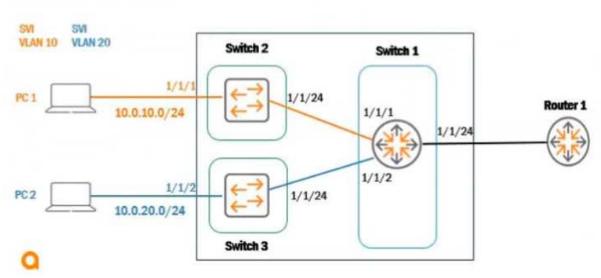

Based on the given topology, what is the requirement on an Aruba switch to enable LLDP messages to be received by Switch 1 port 1/1/24. when Router 1 is enabled with LLDP?

A. LLDP is enabled by default

B. global configuration lldp enable

C. int 1/1/24, Ildp receive

D. int 1/1/24, no cdp

Answer: A

### Explanation:

On Aruba switches, the Link Layer Discovery Protocol (LLDP) is enabled by default on all ports. This protocol is an industry-standard network discovery protocol that is used for network devices to advertise their identity, capabilities, and neighbors on a locally managed network, typical in an IEEE 802 network. This is beneficial for network mapping and troubleshooting purposes. Since LLDP is enabled by default, there is no need for any additional configuration on Switch 1 port 1/1/24 to receive LLDP messages from Router 1, as long as LLDP is not disabled on the port.

### **Question: 3**

You are in a meeting with a customer where you are asked to explain the network redundancy feature Multiple Spanning Tree (MSTP). What is the correct statement for this feature?

A. MSTP configuration ID revision by default as current MSTP root priority

B. MSTP configuration ID name by default using switch IMC address

C MCTD configuration ID name by default using switch serial number

**Questions & Answers PDF** Page 4 D. MSTP configuration ID revision by default as switch serial number Answer: B Explanation: MSTP Multiple Spanning Tree Protocol. MSTP is an IEEE standard protocol for preventing loops in a network with multiple VLANs. MSTP allows multiple VLANs to be mapped to a reduced number of spanning-tree instances. configuration ID consists of two parameters: name and revision. The name is a 32-byte ASCII string that identifies the MSTP region, which is a group of switches that share the same configuration ID and VLAN-to-instance mapping. The revision is a 16-bit number that indicates the version of the configuration ID. By default, the MSTP configuration ID name is set to the switch IMC address, which is a unique identifier derived from the MAC address Media Access Control address. MAC address is a unique identifier assigned to a network interface controller (NIC) for use as a network address in communications within a network segment. of the switch. Reference: https://www.arubanetworks.com/techdocs/ArubaOS 86 Web Help/Content/arubaossolutions/mstp/mstp.htm Question: 4 When using the OSPF dynamic routing protocol on an Aruba CX switch, what must match on the neighboring devices to exchange routes? A. Hello timers B. DR configuration C. ECMP method

D. BDR configuration

Answer: A

Explanation:

OSPF Open Shortest Path First. OSPF is a link-state routing protocol that uses a hierarchical structure to create a routing topology for IP networks. OSPF routers exchange routing information with their neighbors using Hello packets, which are sent periodically on each interface. To establish an adjacency Adjacency is a relationship formed between selected neighboring routers for the purpose of exchanging routing information., OSPF routers must agree on several parameters, including Hello timers, which specify how often Hello packets are sent on an interface. If the Hello timers do not match between neighboring routers, they will not form an adjacency and will not exchange routes. Reference: <a href="https://www.arubanetworks.com/techdocs/ArubaOS-86-Web Help/Content/arubaos-solutions/osfn/osfn.htm">https://www.arubanetworks.com/techdocs/ArubaOS-86-Web Help/Content/arubaos-solutions/osfn/osfn.htm</a>

Question:	5

### DRAG DROP

Match the phase of message processing with the Open Systems interconnection (OSI) layer.

Layer	Phase of Message Processing
Physical Layer	Organizes the data into segments
Network Layer	Organizes the data into packets
Transport Layer	Organizes the data into frames
Data Link Layer	Organizes the data into bits
	Answer:

Layer: 1) Physical layer Phase of Message Processing: d) Organize the data into bits
Layer: 2) Data Link layer Phase of Message Processing: c) Organize the data into frames
Layer: 3) Network layer Phase of Message Processing: b) Organize the data into packets
Layer: 4) Transport layer Phase of Message Processing: a) Organize the data into segments
The OSI model divides the networking process into seven layers, each representing a different step of
the transmission chain. Each layer has its own function and is responsible for well-defined tasks. User
data passes sequentially from the highest layer down through the lower layers until the device transmits
it externally. The lowest layer, the physical layer, converts the data into bits that can be sent over a
physical medium. The second layer, the data link layer, organizes the bits into frames that can be
transmitted over a link between two nodes. The third layer, the network layer, organizes the frames into
packets that can be routed across a network of nodes. The fourth layer, the transport layer, organizes the
packets into segments that can provide reliable and error-free communication between two end
points12. Reference: 1 https://www.linode.com/docs/guides/introduction-to-osi-networkingmodel/ 2 https://en.wikipedia.org/wiki/OSI\_model



## Thank You for trying the PDF Demo

Vendor: HP Code: HPE6-A85

**Exam: Aruba Certified Campus Access Associate Exam** 

https://www.examsnest.com/exam/hpe6-a85/

Use Coupon "SAVE15" for extra 15% discount on the purchase of Practice Test Software. Test your Exam preparation with actual exam questions.

# Start Your Preparation